

Fabric face mask with filter pocket

1" square
(measure
before
continuing)

Solid lines: cut two from print


Dotted lines: cut two from lining

1/4" seam allowance included

Sewing:

1. Place print right sides together and sew along the curved seam; repeat with lining.
2. Finish short edges of lining (serge or fold under 1/4" and sew)
3. Right sides together, pin or clip the lining to the print along the long curved edges, pressing the curved center seams in opposite directions to reduce bulk
4. Sew the top and bottom edges, finger-pressing the center seam in
5. Turn right-side out. The 1/4" seam should make clipping curves unnecessary.
6. Iron edges if desired, but I usually just skip right to top-stitching
7. Top stitch the long edges, about 1/4" from the top (to make a casing for nose wire), and close to edge on the bottom.
8. Thread a wire into the casing made in step 7, bending it in the center to keep it in place.
9. Make a casing for ribbon or elastic by folding the print edges over about 3/8" and then 1/2" (or that the fold lies just beside the finished lining edge). Stitch down.
10. Thread elastic or ribbon through casings; tie to fit snugly. Nose wire should help conform the upper edge to your nose, and the rest of the mask should have as few gaps as possible.

You're done! Keep physically distancing!

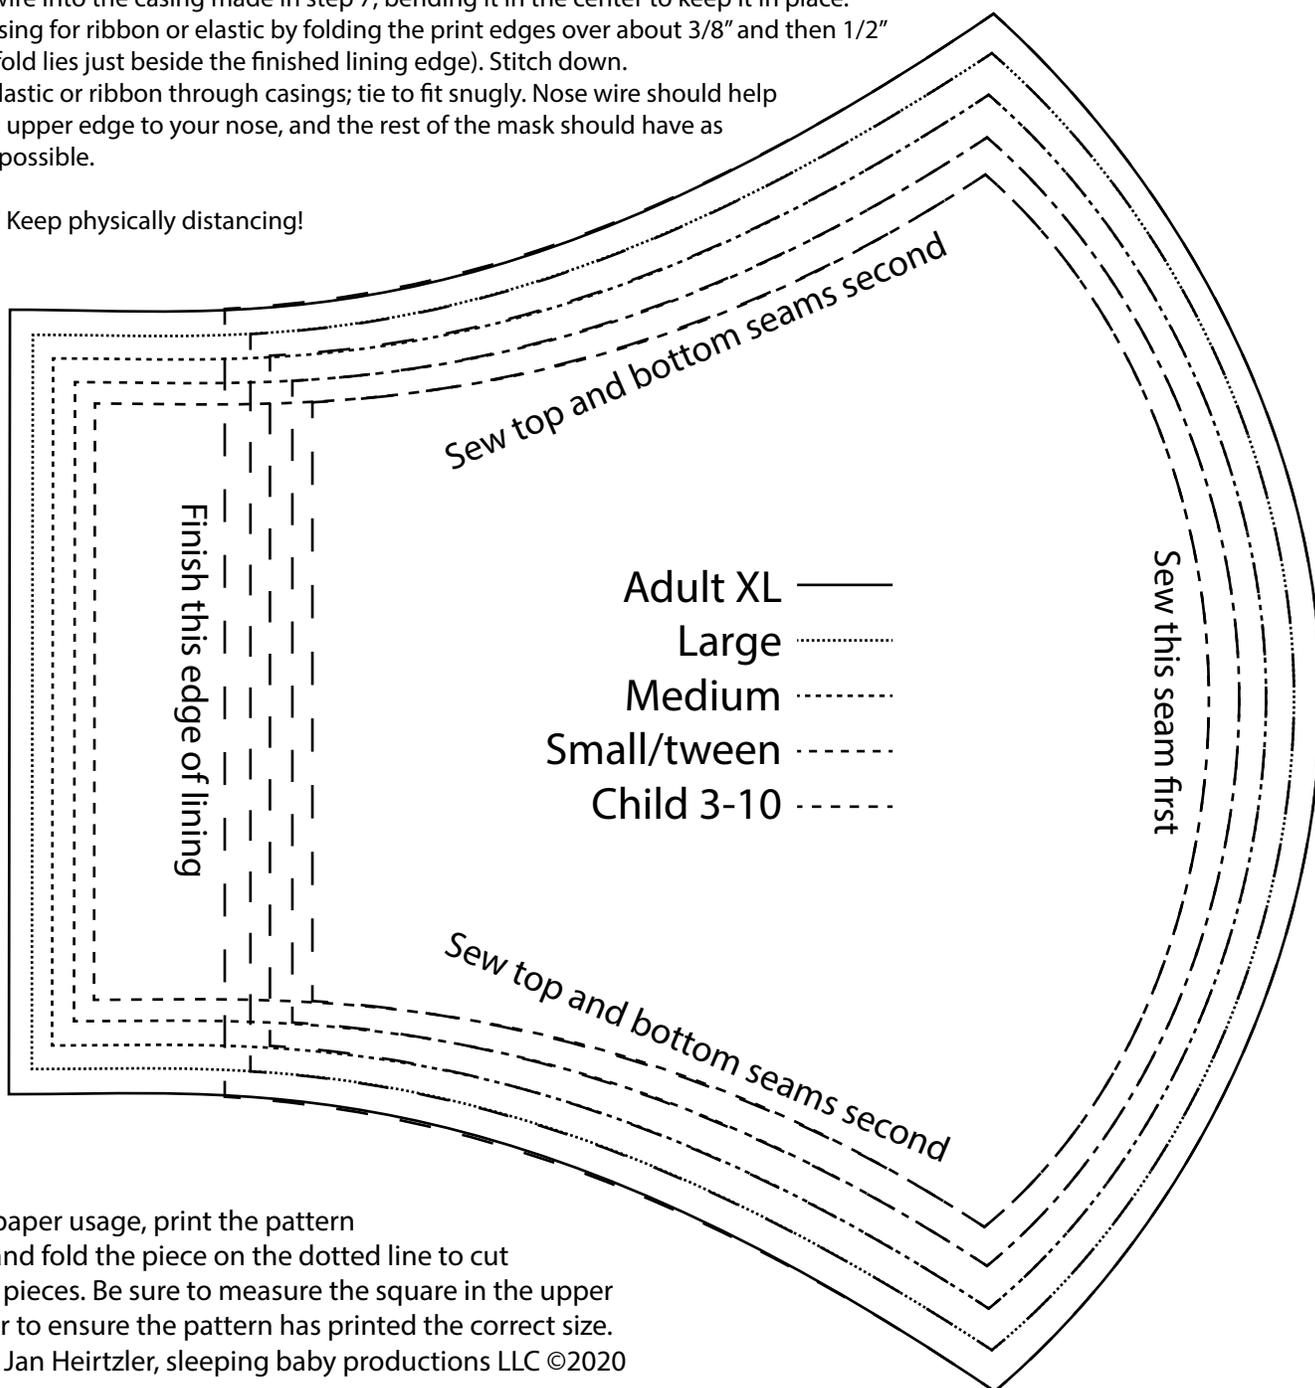

To reduce paper usage, print the pattern just once, and fold the piece on the dotted line to cut your lining pieces. Be sure to measure the square in the upper right corner to ensure the pattern has printed the correct size.
Created by Jan Heitzler, sleeping baby productions LLC ©2020